




DATA SHEET	5550 6585
SILVYN® FPAG	valid from : 26.10.2004

The SILVYN® FPAG straight conduit gland gives a high tensile strength with its all round teeth and vibration protection.
The gland can be removed from the conduit using a small screwdriver.

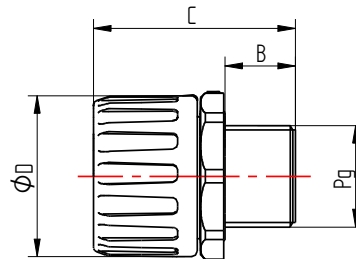

Dimension table:

Part no.	connection thread	B	C	ØD	suitable conduit
5550 6585	SILVYN FPAG Pg 7	9,0	32,5	19,0	FPAS 10
5550 6605	SILVYN FPAG Pg 9	10,0	37,0	23,5	FPAS 13
5550 6625	SILVYN FPAG Pg 11	10,0	36,0	28,5	FPAS 16
5550 6635	SILVYN FPAG Pg 13,5	10,0	36,0	28,5	FPAS 16
5550 6655	SILVYN FPAG Pg 16	11,0	41,0	32,0	FPAS 21
5550 6665	SILVYN FPAG Pg 21	12,0	47,0	44,0	FPAS 28
5550 6675	SILVYN FPAG Pg 29	12,0	49,0	50,5	FPAS 34
5550 6685	SILVYN FPAG Pg 36	12,0	56,5	62,7	FPAS 42
5550 6695	SILVYN FPAG Pg 48	12,0	61,0	76,0	FPAS 54

Technical features:

Connecting thread: Pg 7 to Pg 48 in acc. to DIN 40 430
 Protection class: IP 66 bar, test in acc. to DIN 40 050
 Temperature range: - 40°C to +135°C
 Colour RAL: 9005 (UV resistant)
 (7001)
 Properties: Anti-vibration and tamper resistant
 High pull off strength
 Flame retardant UL 94 V2
 Halogen free
 Oil and solvent resistant
 Material: PA 66

Approvals:



For more information please see our current catalogue.
 Please do not hesitate to contact our laboratory if there any questions regarding resistance against aggressive agents and special oil.

elaborated by: M. Schmid	document: DB55506585EN	page 1 of 1
-----------------------------	------------------------	-------------