

Product data sheet

Item No. 96.032.4053.1

Male connector with strain relief RST20i3S S1 ZR1 V
SW

Connector RST20i3, 3 pole, male, screw connection, 250V/20A,
for cable diameters 6-10 mm, color of coding: black, color of
housing:black



Item No.	96.032.4053.1
EAN	4015573769700
Order Unit	100 Piece(s)

Certificates / Approvals



Technical data

General

Rated current	20 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pull relief	Yes
Pollution degree	3
Mechanical coding	Yes
Interlockable	Yes
Color of coding/ contact carrier	Black
Marking of poles	

Connection Data

Connection cross section solid	4 mm ²
Connection cross section stranded	4 mm ²
Terminations per pole	1

Model

Model	Plug
Number of poles	3

Connection type	Screw connection
Degree of protection (IP)	IP66/IP68


Material

Housing material	Polyamide
Halogen free	Yes
Contact material	CuZn
Insulation components continuous temperature	100 °C
Surface finish	Silver-plated

Dimensions

Length	80.4 mm
Width	34.6 mm
Height	34.6 mm

Technical drawing

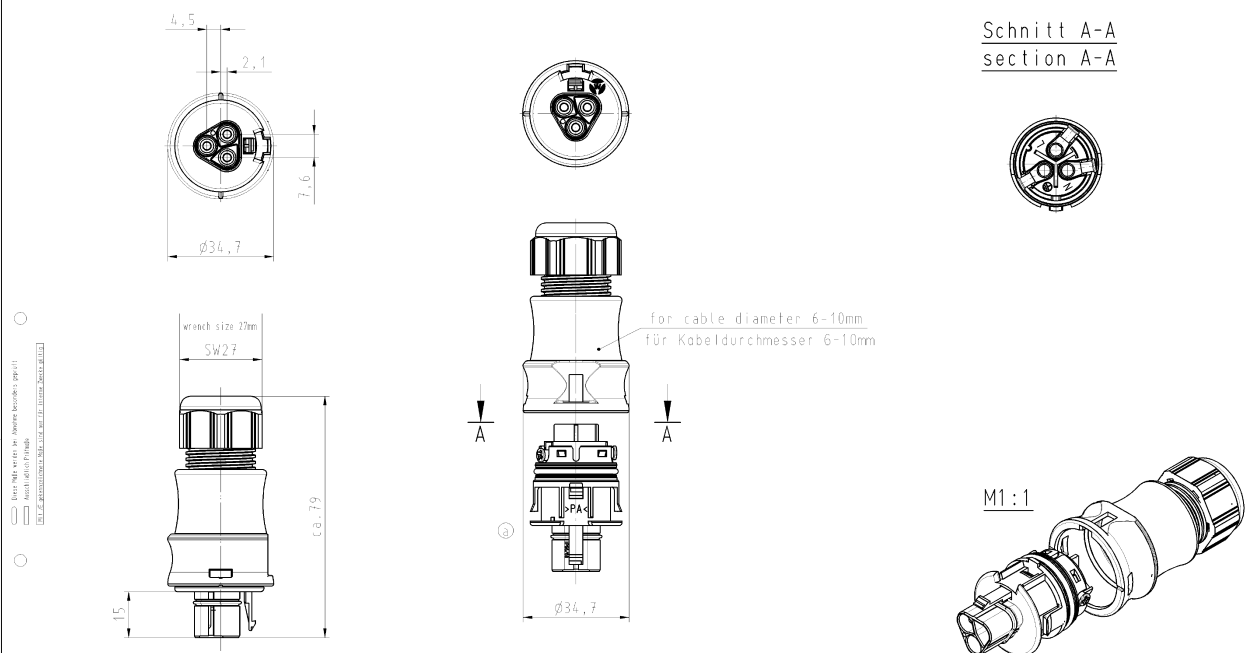

Schnitt A-A
section A-A

for cable diameter 6-10mm
für Kabeldurchmesser 6-10mm

M1:1

Verpackungseinheit: je 100 Stück
packaging unit: per 100

Teile-Nr./ part-nr.	Farbe/ color:	Einz.-Tl.-Nr.: *1/ single-part-nr.:*1	Preis/Einzelnr. nach	Maßstab	Werkstoff und Oberfläche material and surface Farbe: siehe Tabelle color: see table	2002	Tag	Wsp	1. Rev. Änderung		1. Rev. Änderung	Zeichnung Nr.	Bl. 1	von 1	Wsp
96.032.4053.1	schwarz, ähnl. RAL 9005/ black, similar to RAL 90051	/	1:1			27.01.	KWZ			T	96.032.4053.0 01K	a		
96.032.4053.0	lichtgrau, ähnl. RAL 7035/ lightgrey, similar to RAL 70350	/												

Wieland **Typ RST201.3**
S SI ZR1 V

Bezeichnung: **STECKERTEIL MIT ZUGENTLASTUNG**
male connector with cord grip
screw connection without wire protection/Schraubsteck ohne Drahtschutz